

J Pro



INSTRUCTION MANUAL




CAR DASHBOARD FOR WRANGLER

Welcome!

Thank you for purchasing this product, please read the instructions carefully before use.


Let ' s see the wider world.

LIST

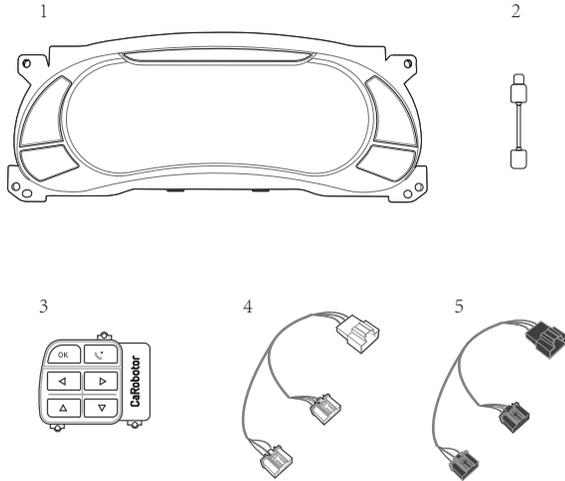

1	2	3	4	5
J Pro	Type C - USB	Button	sync cord	Power line


OVERVIEW

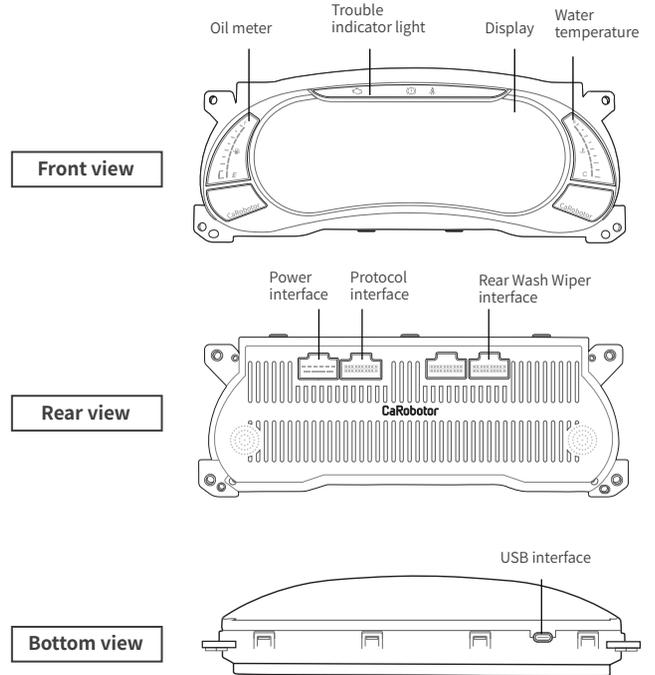

J PRO INSTALLATION STEPS


1

Remove the cover plate from under the steering wheel.

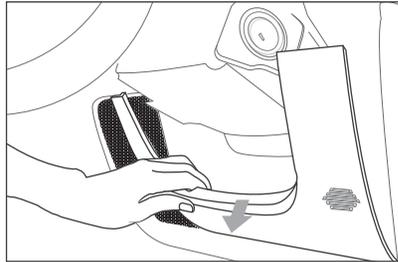


2

Take out the switch window key panel.

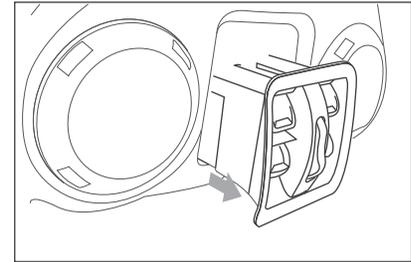


3

Unscrew the 4 screws as shown, and remove the center control panel in the shaded area as shown.

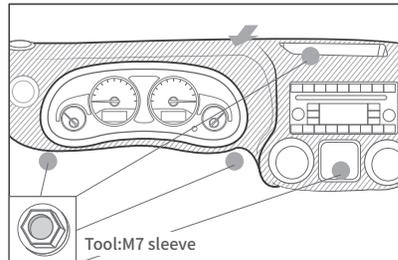

4

As shown in the picture, unscrew 4 screws from the original car meter, and then remove the original car meter.

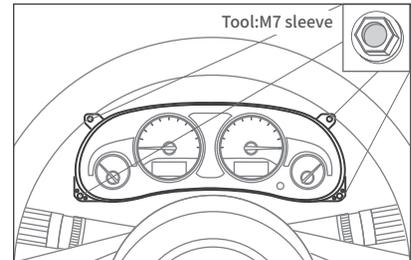


SYNCHRONOUS UPDATE

5

First connect the synchronous cable and power cord to the car and original car meter.


And start the engine.

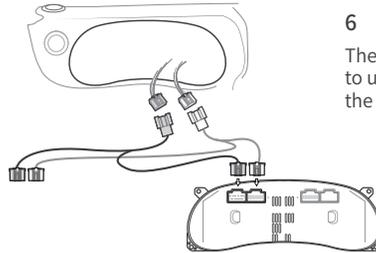

Original car meter

6

Then connect to J PRO. Press the key to unlock and wait for J PRO to enter the interface to be activated.

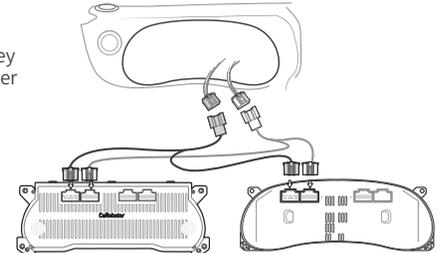

J Pro

Original car meter


7

Please enter the activation code in the activation interface and start syncing data.




8

When synchronization is complete, be sure to turn off the engine and unplug the sync line as prompted.




9

Please install the cover according to the original procedure. Complete the installation.




J Pro


J PRO KEY INSTALLATION STEPS



1
Remove 2 screws from the back of the steering wheel as shown.




2
Remove the airbag module, unplug the wiring harness plug.

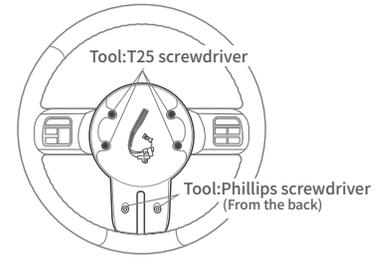


3
Unscrew the 6 screws shown in the figure.

4
After removing the screw, press on the indicated area with your hand to pop the shell out.




5
Unscrew the back screw of the original car keys and replace it with J PRO keys. Then install the key panel according to the original steps to complete the installation.



J PRO KEY INSTRUCTIONS


1

Press [OK] to pop up the Mode switching window.

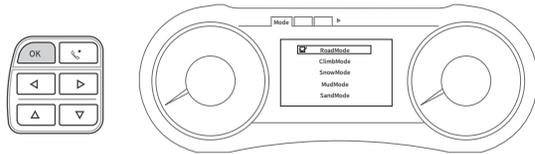


3

Press [Δ] [▽] to Switch mode.

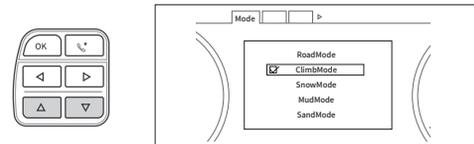


2

Long press [OK] to calibrate car posture.

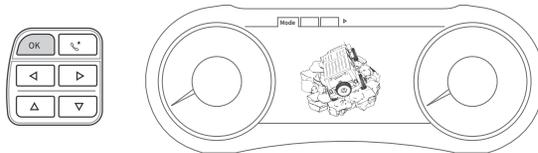

4

Press [<] [>] to switch the status bar label.

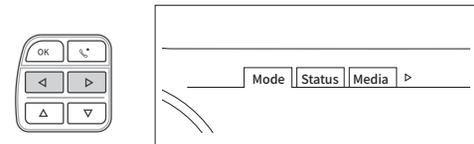

J PRO SYSTEM UPGRADE

TOOLS


Please format the U disk as the formation below firstly.
(You'll have to prepare your own U disk)



Type C - USB



STEPS DEMONSTRATION

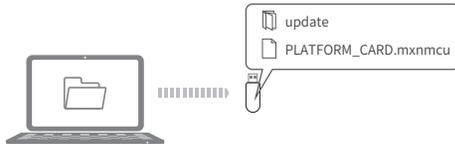


1

Firstly, you have to unzip the JEEP_UPDATE.zip file, and then copy the update directory and PLATFORM_CARD.mxnmcu file to your disk that is in the directory you unzipped.

2

Connect the USB drive and the dashboard with type C - USB.



3

Switch to the system upgrade interface under the [Set], long press [OK] until you can see the system will restart upgrade.



(release the ok button after the update started.)



4

Once system upgrades completed, it is required pulling USB drive out within 5 seconds after the progress bar was full. System will be automatically restart in a few seconds and complete upgrade.


(If the system can't be automatically restart after 1 minute, please pull out the key and press the lock button, then restart the vehicle after 1 minute.)




J PRO UNIT UPGRADE

TOOLS

Please format the U disk as the formation below firstly.

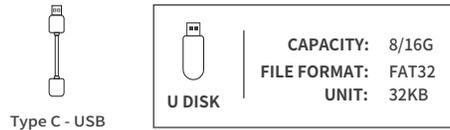

STEPS DEMONSTRATION

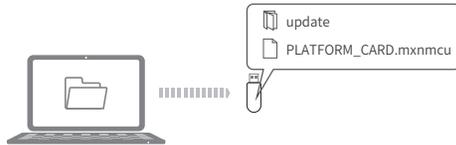


1

Firstly, you have to unzip the JEEP_UPDATE.zip file, and then copy the update directory and PLATFORM_CARD.mxnmcu file to your disk that is in the directory you unzipped.

2

Connect the USB drive and the dashboard with type C - USB.




3

Switch to the control module upgrade interface under the [set], please long press [OK] until it prompts UNIT updating...



4

When the dashboard is updating the UNIT , the two LED panels at the two sides are flashing. After the two LED panels stop and light again, it means we update the UNIT successfully.



5

Pull out the type C - USB & U disk.

